

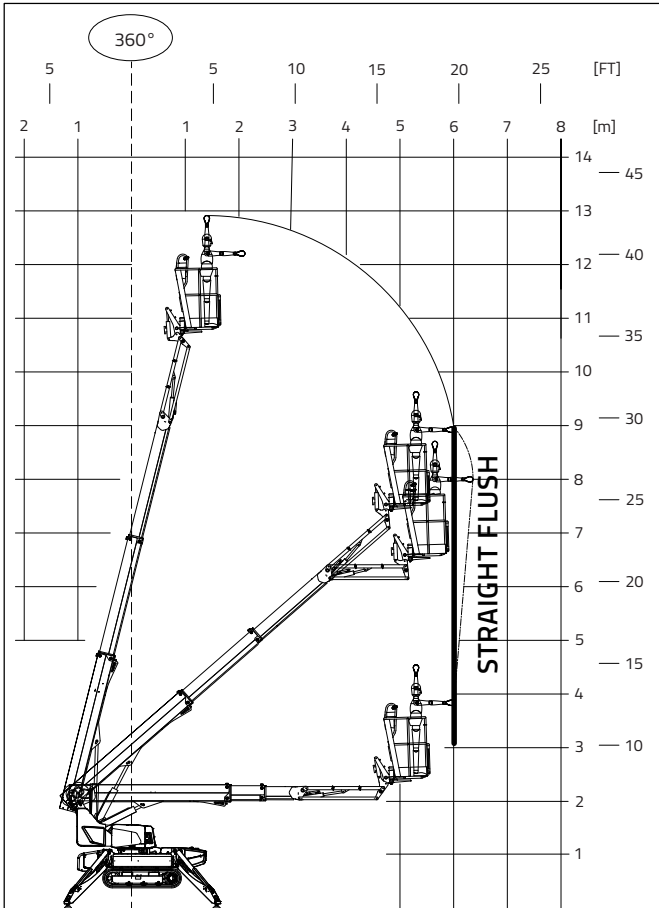
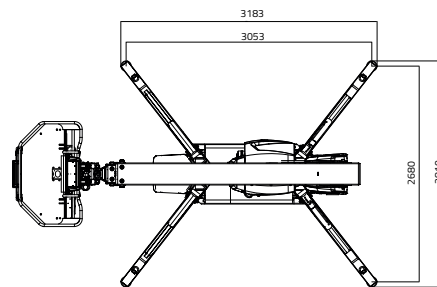


TELECRAWLER13S



CAPACITY 230 KG
(2 persons 80x2=160 kg + tool box 70 kg)

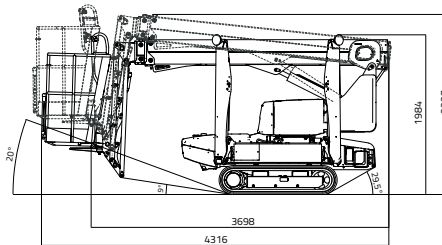


 12,90 m


 6,40 m


 4,316 m


 3,698 m


 1,948 m


 1480 x 610 x h1100 mm
DSE (Dual Side Entry)


 16° / 28,7 %

 748 - 1100 mm

 1599 daN - 12 daN/cm²

 3200 x 2800 mm

 Automatic set up system IIS std.

 Remote control

 GPRS-GPS

 R.A.H.M.

TELECRAWLER13S



LITHIUM-ION SYSTEM

Lithium-ion powered.....	4,15 kWh
Electric motor :	
- rated voltage.....	48 V
- rated power.....	2 kW
Onboard battery charger.....	220V +-30V 50-60Hz / 110V +-30V 50-60Hz
Autonomy.....	4-5 h
Recharge time on flat batteries.....	4 h (indicative)
Recharge time to 80% on flat batteries.....	2 h (indicative)

ELECTRIC MOTOR

Standard.....	230V / 50 Hz - 2,2 kW
Optional.....	110V / 50 Hz - 2,2 kW

TRACKED UNDERCARRIAGE

Track tensioner.....	grease-filled
Rollers no. per side.....	3 + slide
Translation speed.....	1,3 - 2,3 - 3,2 km/h

WEIGHT MACHINE 2.050 kg

MAX WIND SPEED 12,5 m/s